

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

12

**EUROPEAN PATENT SPECIFICATION**

45 Date of publication of patent specification: 30.07.86

51 Int. Cl.<sup>4</sup>: H 01 J 61/44

21 Application number: 84200580.3

22 Date of filing: 24.04.84

54 Low-pressure mercury vapour discharge lamp.

30 Priority: 25.04.83 NL 8301445

43 Date of publication of application:  
07.11.84 Bulletin 84/45

45 Publication of the grant of the patent:  
30.07.86 Bulletin 86/31

84 Designated Contracting States:  
AT BE CH DE FR GB IT LI NL SE

50 References cited:  
EP-A-0 023 068

70 Proprietor: N.V. Philips' Gloeilampenfabrieken  
Groenewoudseweg 1  
NL-5621 BA Eindhoven (NL)

72 Inventor: Van Kemenade, Johannes Trudo  
Cornelis  
c/o INT. OCTROOIBUREAU B.V. Prof. Holstlaan 6  
NL-5656 AA Eindhoven (NL)  
Inventor: De Hair, Johannes Theodorus  
Wilhelmus  
c/o INT. OCTROOIBUREAU B.V. Prof. Holstlaan 6  
NL-5656 AA Eindhoven (NL)  
Inventor: Berns, Everhardus Gradus  
c/o INT. OCTROOIBUREAU B.V. Prof. Holstlaan 6  
NL-5656 AA Eindhoven (NL)

74 Representative: Evers, Johannes Hubertus  
Marie et al  
INTERNATIONAAL OCTROOIBUREAU B.V Prof.  
Holstlaan 6  
NL-5656 AA Eindhoven (NL)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

## Description

The invention relates to a low-pressure mercury vapour discharge lamp having a very satisfactory colour rendition, a colour temperature of the emitted white light in the range of 2300 to 3300 K and a color point on or near the Planckian curve and provided with a gas-tight radiation-transparent envelope containing mercury and rare gas and with a luminescent layer containing a luminescent halophosphate and a luminescent material activated by bivalent europium.

The expression "a very satisfactory colour rendition" is to be understood to mean in the present description and the appended claims that the average colour rendering index  $R(a,8)$  (average value of the rendering indices of eight test colours as defined by the Commission Internationale d'Eclairage: Publication CIE, No. 13.2 (TC-3.2), 1974) has a value of at least 85.

The colour of visible radiation is characterized by the colour coordinates (x,y) determining the colour point in the colour triangle (see Publication CIE, No. 15 (E-1.3.1), 1971). Lamps for general illumination purposes should emit light which can be considered to be white. White radiation is found in the colour triangle at colour points located on the Planckian curve. This curve, which is also designated as the curve of the black body radiators and which will be denoted hereinafter as the curve P, comprises the colour points of the radiation emitted by a completely black body at different temperatures (the so-called colour temperature). A given colour temperature is allotted not only to a given point on the curve P, but also to radiation having colour coordinates located on a line intersecting the curve P at that point (see the said Publication CIE, No. 15). If this radiation has a colour point near the curve P, this radiation is also considered as white light having this given colour temperature. In the present description and the appended claims, the expression "a colour point near the curve P" is to be understood to mean that the distance of the colour point from the point on the curve P having the same colour temperature is at most 20 MPCD. MPCD (Minimum Perceptible Colour Difference) is the unit of colour difference (see the Publication of J. J. Rennilson in Optical Spectra, October 1980, page 63).

A large number of embodiments of low-pressure mercury vapour discharge lamps which have been known for tens of years and are frequently used each contain a luminescent material chosen from the group of the alkaline earth metal halophosphates activated by  $Sb^{3+}$  and  $Mn^{2+}$ . These lamps have the advantage that they are inexpensive and emit a satisfactorily high luminous flux. A great disadvantage of these lamps, however, is that their colour rendition leaves much to be desired. They generally have  $R(a,8)$  values of the order of 50 to 60 and only in lamps at a high colour temperature (for example 5000 K) is a value of  $R(a,8)$  of approximately 75 reached, which is not yet considered to be a satisfactory colour rendition.

Lamps with which a very high colour rendition is reached have been known for a long time. These lamps are provided with special luminescent materials, i.e. a tin-activated red-luminescing material on the basis of strontium orthophosphate mostly combined with a blue-emitting halophosphate activated by  $Sb^{3+}$ , in particular such a strontium halophosphate. The said strontium orthophosphate luminesces in a very wide band which extends into the deep red. These known lamps have the disadvantage inherent in the use of the said strontium orthophosphate of a comparatively small luminous flux and of a poor maintenance of the luminous flux during the life of the lamp. It has been found that the latter disadvantage results in that in practice this material can hardly be used in the case of a higher load by the radiation emitted by the mercury discharge.

A lamp of the kind described in the opening paragraph is known from German Patent Application 2,848,726. This lamp having a very satisfactory colour rendition contains, like the aforementioned lamp type, a red-luminescing tin-activated strontium orthophosphate and further a borate-phosphate activated by bivalent europium, which has an emission band with a maximum at approximately 480 nm and a half-value width of approximately 85 nm. Preferably, a luminescent alkaline earth metal halophosphate is further used in the luminescent layer of this lamp. Due to the use of the luminescent strontium orthophosphate, this known lamp again has the disadvantages of a comparatively low luminous flux and in particular of a poor maintenance of the luminous flux during the life of the lamp. The known lamp further has the disadvantage that a very satisfactory colour rendition is reached only at colour temperature above approximately 3500 K. Embodiments of the known lamp at very low colour temperatures (below 3000 K) are not possible.

The invention has for its object to provide low-pressure mercury vapour discharge lamps having a very satisfactory colour rendition at a low colour temperature of the emitted radiation whilst avoiding or substantially avoiding the disadvantages of the known lamps.

For this purpose, according to the invention, a low-pressure mercury vapour discharge lamp of the kind mentioned in the opening paragraph is characterized in that the luminescent layer comprises:

- a. at least one luminescent alkaline earth metal halophosphate activated by trivalent antimony and bivalent manganese, having a colour temperature of the emitted radiation of 2900 to 5000 K,
- b. at least one luminescent material activated by bivalent europium, having an emission maximum in the range of 470 to 500 nm and a half-value width of the emission band of at most 90 nm, and
- c. a luminescent rare earth metal metaborate activated by trivalent cerium and bivalent manganese, having a monoclinic crystal structure, whose fundamental lattice satisfies the formula  $Ln(Mg,Zn,Cd)B_5O_{10}$ , in which Ln represents at least one of the elements yttrium, lanthanum and gadolinium and in which up to

20 mol.% of the B can be replaced by Al and/or Ga, which metaborate exhibits red  $Mn^{2+}$  emission, and in that the lamp is provided with means for absorbing at least in part blue radiation having wavelengths below 480 nm.

Experiments which have led to the invention have surprisingly shown that a very high value for  $R(a,8)$  can also be obtained with an emission which has a considerably narrower band than that of the known luminescent strontium orthophosphate, but whose emission maximum is located at substantially the same point. It has been found that the emission of rare earth metal metaborate activated by  $Ce^{3+}$  and  $Mn^{2+}$  is very suitable for this purpose. This metaborate is known *per se* and is described in Dutch Patent Application 7905680 (PHN 9544) and 8100346 (PHN 9942). It has a fundamental lattice of monoclinic crystal structure according to the formula  $Ln(Mg,Zn,Cd)B_6O_{10}$ . In this formula Ln is at least one of the elements Y, La and Gd. In the borate up to 20 mol.% of the B can be replaced by Al and/or Ga, which, like the choice of the elements Mg, Zn and/or Cd, has only little influence on the luminescent properties. The Ce activator is incorporated at an Ln site (and may even occupy all the Ln sites) and absorbs the exciting radiation energy (mainly 254 nm in a low-pressure mercury vapour discharge lamp) and transmits it to the Mn activator, which is incorporated at an Mg (and/or Zn and/or Cd) site. The borate has a very efficient emission originating from  $Mn^{2+}$  in a band with a maximum at approximately 630 nm and a half-value width of approximately 80 nm.

In order to obtain values of  $R(a,8)$  of at least 85, in a lamp according to the invention the metaborate (the material c) has to be combined with a material activated by bivalent europium with an emission maximum in the range of 470 to 500 nm and a half-value width of the emission band of at most 90 nm (the material b) and with at least one luminescent halophosphate (the material a) chosen from the group of the Sb- and Mn-activated alkaline earth metal halophosphates.

With combinations of the luminescent materials a, b and c, lamps having a very satisfactory colour rendition can be manufactured for colour temperatures of approximately 3200 K and higher. In order to obtain low to very low colour temperatures (down to at least 2300 K), a lamp according to the invention has to be provided with means for absorbing at least in part blue radiation having wavelengths below 480 nm. The use of such means in a low-pressure mercury vapour discharge lamp provided with a luminescent material in all cases leads to a shift of the colour point of the radiation emitted by the lamp because the blue radiation originating from the mercury discharge and, as the case may be, also the blue radiation originating from the luminescent material are absorbed at least in part. This shift of the colour point due to blue absorption makes it possible to obtain colour temperatures in the range of 2300—3300 K, with lamps according to the invention, as will be explained more fully hereinafter.


An advantage of the lamps according to the invention is that the luminescent materials used are very efficient so that high luminous fluxes can be obtained. It has further been found that these materials exhibit a very favourable lamp behaviour. This means that when provided in a lamp, they retain their favourable luminescent properties and that they exhibit only a low decrease in luminous flux during the life of the lamp. This is also the case with a comparatively high radiation load, for example in lamps having a small diameter, for example 24 mm. It should be noted that the use of the known luminescent strontium orthophosphate—due to the strong decrease in luminous flux, especially at high loads—in practice mostly has remained limited to lamps having a large diameter (36 mm).

It has further been found that the use in lamps of the said metaborate leads not only to very high values for the general colour rendering index  $R(a,8)$ , but also to a very satisfactory rendition of a very large number of individual object colours. This results in that with lamps according to the invention, errors in the colour rendition due to disruption of metamerism are completely or substantially completely avoided.

Preferably, a lamp according to the invention is characterized in that the luminescent material further contains a luminescent material activated by trivalent terbium (material d) which exhibits a green  $Tb^{3+}$  emission. The use of the Tb-activated luminescent materials has the advantage that a larger colour temperature range for the lamps according to the invention becomes possible. In general, such a material is very desirable if lamps having a comparatively low colour temperature (from 2300 K) with the said high value of  $R(a,8)$  should be obtained. Apart therefrom it has been found that also for higher colour temperatures, generally the most favourable results are obtained if a material with Tb emission is used. The Tb emission yields an additional degree of freedom, as a result of which optimization becomes more readily possible. Furthermore, the use of Tb-activated luminescent materials has the advantage that such green-luminescing materials are generally very efficient and contribute significantly to the luminous flux emitted by the lamp. As the material d use may be made, for example, of the known Tb-activated cerium-magnesium aluminates (see Dutch Patent Specification 160,869 (PHN 6604) or cerium aluminates (see Dutch Patent Application 7216765 (PHN 6654), which aluminates have a hexagonal crystal structure related to magneto-plumbite. It is also very advantageous to use a Ce- and Tb-activated metaborate whose fundamental lattice is the same as that of the metaborates with red  $Mn^{2+}$  emission (the material c). In these known borates (see the afore mentioned Dutch Patent Applications 7905680 and 8100346) Ce and Tb are incorporated at an Ln site and the exciting radiation is absorbed by the cerium and transmitted to the terbium activator. The said Tb-activated materials all have a very favourable lamp behaviour and especially a satisfactory maintenance of the high luminous flux during the operation of the lamps.

A preferred embodiment of a lamp according to the invention is characterized in that the luminescent metaborate c is further activated by trivalent terbium, the metaborate c being at the same time the material d, and satisfies the formula

# 0 124 175



in which

$$\begin{aligned} 0.01 &\leq f \leq 1-g \\ 0.01 &\leq g \leq 0.75 \\ 0.01 &\leq h \leq 0.30 \end{aligned}$$

and in which up to 20 mol.% of the B can be replaced by Al and/or Ga. This lamp has the great advantage that both the red  $Mn^{2+}$  emission and the green  $Tb^{3+}$  emission are supplied by one luminescent material. Thus, the production of the lamps is of course simplified because a smaller number of luminescent materials are required. In these lamps, the desired relative red  $Mn^{2+}$  and green  $Tb^{3+}$  contributions can be adjusted by varying the concentrations of Mn and Tb in the metaborate. The value of the said relative contributions depends upon the desired colour point of the lamp, upon the luminescent materials *a* and *b* used and upon the extent of absorption of blue radiation. It is possible to prepare and to optimize one luminescent metaborate, in which the ratio of  $Mn^{2+}$  to the  $Tb^{3+}$  emission has a value near the average desired value and to carry out a correction in a given lamp application (depending upon the desired colour point) either with a small quantity of a red-or deeper red-luminescing metaborate or with a small quantity of a green-or deeper green-luminescing Tb-activated material. Of course, it is alternatively possible to optimize two luminescent metaborates, with which lamps having any desired colour temperatures can be obtained by the use of suitable mixtures of these two materials.


In a lamp according to the invention, the means for absorbing blue radiation can be constituted by the radiation-transparent envelope of the lamp. The envelope of the known low-pressure mercury vapour discharge lamps for general illumination purposes consists of glass which transmits visible radiation and has an absorption edge at 280—310 nm. This means that the usual glass does not substantially transmit ultraviolet radiation having wavelengths smaller than 280—310 nm. It has been found that glasses having an absorption edge at approximately 430—470 nm can be advantageously used for the glass envelope of lamps according to the invention. These yellow-coloured filter glasses, whose absorption properties can be influenced within certain limits by means of the glass composition, are known *per se*. It is also possible to use the conventional glass as lamp envelope for lamps according to the invention, in which event the absorption properties are obtained by providing a suitable lacquer layer on the envelope.

In an advantageous embodiment of a lamp according to the invention, the means for absorbing blue radiation are constituted by a yellow pigment. The use of yellow pigments in low-pressure mercury vapour discharge lamps is known *per se*. A very suitable pigment is the known nickel titanate (titanium dioxide containing small quantities of nickel oxide). The desired absorption properties of such a pigment can be adjusted by mixing this pigment with a white substance (for example barium sulphate). These pigments have the advantage that they generally are satisfactorily resistant to the mercury discharge.

The yellow pigment can be mixed with the luminescent materials of the luminescent layer. This has the advantage that the lamp can be manufactured in a simple manner because the luminescent materials can be provided in the lamp together with the pigment in one processing step.

It is alternatively possible to provide the pigment on the inner side of the lamp envelope as an absorption layer on which the luminescent layer is applied on the side facing the discharge. Such a double layer has the advantage that higher relative luminous fluxes can generally be obtained with the lamp.

A lamp according to the invention is to be preferred which is characterized in that the means for absorbing blue radiation are constituted by a luminescent aluminate activated by trivalent cerium having a garnet crystal structure according to the formula



in which M is at least one of the elements yttrium, gadolinium, lanthanum and lutetium and in which

$$\begin{aligned} 0.01 &\leq j \leq 0.15 \\ 0 &\leq k \leq 3 \\ 0 &\leq p \leq 1. \end{aligned}$$

The said garnet is a luminescent material known *per se* (see, for example, Appl. Phys. Letters, 11, 53, (1967) and J. O. S. A., 59, No. 1 60, 1969), which absorbs besides short-wave ultraviolet radiation especially also radiation having wavelengths between approximately 400 and 480 nm. The emission of this garnet consists of a wide band (half-value width approximately 110 nm) with a maximum at approximately 560 nm. The use of this luminescent garnet in lamps according to the invention as means for absorbing blue radiation has the great advantage that the absorbed radiation is not lost, but is converted into useful radiation with a high efficiency. Consequently, high luminous fluxes can be obtained. As appears from the aforementioned formula and conditions, as cation M one or more of the elements Y, Gd, La and Lu can be used in the garnet and the aluminium can be replaced within the aforementioned limits in part by gallium and/or scandium. The Ce activator replaces part of the M and is present in a concentration of 0.01 to 0.15.

Ce contents lower than the said lower limit in fact lead to materials having an insufficient blue absorption. The Ce content is chosen to be not larger than 0.15 because with such high contents the garnet is not formed to a sufficient extent and undesired subphases are obtained.

5 Preferably, such a lamp according to the invention is characterized in that M in the garnet is yttrium and in that the garnet does not contain Ga and Sc ( $k=p=0$ ). Such materials in fact have the most favourable absorption properties and yield the highest luminous fluxes.

10 In an advantageous embodiment of a lamp according to the invention, the garnet activated by  $Ce^{3+}$  is mixed with the remaining luminescent materials of the luminescent layer. In fact such a lamp can be manufactured in a simple manner because the absorption means can be provided in the lamp together with the luminescent layer in one processing step.

15 In another embodiment of a lamp according to the invention, the garnet activated by  $Ce^{3+}$  is provided on the inner side of the lamp envelope as an absorption layer, on which the luminescent layer is disposed on the side facing the discharge. Especially at very low colour temperatures, higher luminous fluxes can be obtained with such lamps than in the case of the use of a mixture of the luminescent materials and the garnet.

A very advantageous embodiment of a lamp according to the invention is characterized in that material *b* is a luminescent aluminate activated by bivalent europium corresponding to the formula



20 in which

$$\begin{aligned} 0 \leq q &\leq 0.25, \\ 0.001 \leq r &\leq 0.10 \text{ and} \\ 2 \leq s &\leq 5, \end{aligned}$$

25 which aluminate has its emission maximum at 485—495 nm and has a half-value width of 55—75 nm. The colour point of the radiation emitted by such an aluminate has the coordinates  $x=0.152$  and  $y=0.360$ . The said luminescent strontium aluminates are described more fully in Dutch Patent Application 8201943 (PHN 10347). They fully satisfy the imposed condition of an emission having a comparatively narrow band with a maximum in the range of 470 to 500 nm. Furthermore, these materials luminesce very efficiently and can be subjected for a long time to high loads in lamps and then exhibit only a very small decrease in luminous flux.

30 Another favourable embodiment of a lamp according to the invention is characterized in that the material *b* is a luminescent aluminate activated by bivalent europium corresponding to the formula




40 in which

$$\begin{aligned} 0 \leq t &\leq 0.25, \\ 0.005 \leq r &\leq 0.25 \text{ and} \\ 5 \leq s &\leq 10, \end{aligned}$$

45 which aluminate has its emission maximum at 475—485 nm and has a half-value width of 70—90 nm. The colour point of the radiation emitted by such a barium aluminate has the coordinates  $x=0.161$  and  $y=0.242$ . These luminescent barium aluminates are described more fully in Dutch Patent Application 8105739 (PHN 10220). These aluminates also fully satisfy the condition of an emission having a comparatively narrow band with a maximum in the range of 470—500 nm. These materials are very efficiently luminescing materials which have a high maintenance of the luminous flux during the life of the lamp and can be subjected to high loads in lamps.

50 A still further advantageous embodiment of a lamp according to the invention is characterized in that the material *b* is a luminescent borate phosphate activated by bivalent europium corresponding to the formula



55 in which

$$\begin{aligned} 0 \leq v &\leq 0.5 \\ 0 \leq w &\leq 0.2 \\ 0.001 \leq z &\leq 0.15 \\ 1.75 \leq m &\leq 2.30 \\ 0.05 \leq n &\leq 0.23, \end{aligned}$$

65 which borate phosphate has its emission maximum at 470—485 nm and has a half-value width of 80—90

nm. The colour point of the radiation emitted by such a borate phosphate has the coordinates  $x=0.191$  and  $y=0.308$ . These luminescent borate phosphates are known from the aforementioned German Patent Application 2848726. They have a tetragonal crystal structure and prove to be efficiently luminescing materials having an emission which is very suitable for lamps according to the invention.

5 Embodiments of lamps according to the invention will now be described more fully with reference to the drawings.

In the drawings,

Figure 1 shows diagrammatically and in sectional view a low-pressure mercury vapour discharge lamp according to the invention,

10 In Figure 1, reference numeral 1 denotes the glass wall of the low-pressure mercury vapour discharge lamp. At the ends of the lamp are arranged electrodes 2 and 3 between which the discharge takes place during operation of the lamp. The lamp is provided with rare gas which serves as ignition gas and further with a small quantity of mercury. The lamp has a length of 120 cm and an inner diameter of 24 mm and is intended to consume during operation a power of 36 W. The wall 1 is coated on the inner side with a  
15 luminescent layer 4 which comprises the luminescent materials *a*, *b*, *c* and, optionally *d*. The layer 4 further comprises means for absorbing blue radiation in the form of a quantity of garnet mixed with the luminescent materials. The layer 4 can be provided on the wall 1 in a conventional manner, for example, by means of a suspension comprising the luminescent materials.

For further explanation reference is now made to Figure 2 of the drawings. In this Figure, a part of the  
20 colour triangle is represented in the (x,y) colour coordinate plane. The x coordinate is plotted on the abscissa and the y coordinate of the colour point is plotted on the ordinate. Of the sides of the colour triangle itself, on which the colour points of monochromatic radiation are located, only the part indicated by M is visible in Figure 2. The Figure shows the Planckian curve designated by P. Colour points of constant colour temperature are located on lines intersecting the curve P. A number of these lines are drawn and  
25 indicated by the associated colour temperature: 2300 K, 2500 K, . . . 5000 K. In Figure 2, numerals and letters further designate the colour point of a number of lamps and luminescent materials. In the present description and the appended claims, the expression "colour point of a luminescent material" is to be understood to mean the colour point of a low-pressure mercury vapour discharge lamp which has a length of approximately 120 cm and an inner diameter of approximately 24 mm and is operated with a consumed  
30 power of 36 W, which lamp is provided with a luminescent layer which only comprises the said luminescent material, the layer thickness being chosen to have an optimum value with regard to the relative luminous flux. Therefore, with the colour points of luminescent materials, the influence of the visible radiation emitted by a low-pressure mercury vapour discharge itself is invariably taken into account. It should be noted that the value of the luminous efficiency of the luminescent material as yet has a slight  
35 influence on the location of the colour point. The use of the luminescent materials in other low-pressure mercury vapour discharge lamps than the said 36 W-type will generally yield only a very small shift of the colour points with respect to those shown here.

In Figure 2 reference numeral 70 denotes the colour point of a red-luminescing Ce- and Mn-activated metaborate having the colour coordinates (x;y)=(0.545; 0.308). Reference numeral 90 denotes the colour  
40 point of a green-luminescing Ce- and Tb-activated metaborate (colour coordinates  $x=0.323$  and  $y=0.537$ ). The points designated by reference numerals 40, 50 and 60 are the colour points of three luminescent materials activated by bivalent europium with an emission maximum between 470 and 500 nm. The graph of Figure 2 further includes the colour points of a number of conventional calcium halophosphates emitting white light and having different colour temperatures (the points 10, 20 and 30 having colour temperatures  
45 of 2945, 3565 and 4335 K, respectively). Other colour temperatures are possible by variation in the Sb:Mn ratio, but also by the use of mixtures of halophosphates.

If a given luminescent material is used in a lamp together with a means for absorbing blue radiation, the colour point of the emitted radiation performs a shift due to the blue absorption. In Figure 2, this shift is  
50 shown for the luminescent materials indicated above when use is made of an yttrium aluminium garnet activated by  $\text{Ce}^{3+}$  corresponding to the formula  $\text{Y}_{2.9}\text{Ce}_{0.1}\text{Al}_3\text{O}_{12}$  as blue absorbing means. This garnet is provided in the lamp as an absorption layer on the inner wall of the lamp envelope. The luminescent layer comprising the relevant luminescent material is applied to this absorption layer at the surface facing the discharge. With the use of the luminescent garnet, the colour point of the lamp is shifted not only due to  
55 absorption, but also due to the contribution of the garnet emission to the emitted radiation. The value of the shift depends not only upon the specific composition of the relevant garnet, but of course also upon the thickness of the absorption layer. A measure for the absorption of the aforementioned garnet with a given layer thickness can be found in the influence exerted by the absorption layer on the colour point of white halophosphate, (colour temperature 4335 K, point 30 in Figure 2). In the following Table 1, the colour points  
60 are given of lamps comprising this halophosphate and absorption layers of the said garnet with different layer thicknesses. The layer thickness is given in gms per lamp (36 W-type, length 120 cm, diameter 24 mm).

TABLE 1

	Colour point	x	y	Layer thickness garnet in gms per lamp
	30	0.368	0.379	0
5	31	0.387	0.408	0.36
	32	0.397	0.424	0.60
10	33	0.406	0.438	0.84
	34	0.414	0.451	1.08

In the first column of Table 1, under the heading "Colour point" the reference numeral of Figure 2 is indicated which denotes the colour point in the colour triangle. In Figure 2, the points 30, 31, 32, 33 and 34 are interconnected by a line, which clearly indicates the shift. Of the remaining aforementioned luminescent materials, whose colour point is indicated in Figure 2, the shift of the colour point is also shown with the use of an absorption layer of the same garnet with the same layer thicknesses (0.36 . . . 1.08 g per lamp). These points are also interconnected by a line for each luminescent material (see 20, 21, 22, 23, 24 and further 10—14, 40—44, 50—54, 60—64, 70—74 and 90—94).

With the use of two luminescent materials in a lamp, all the colour points can be reached which are located on the connection line of the colour points of the two materials chosen. By way of example, in Figure 2 the connection line K of the colour points 70 (red-luminescing Ce- and Mn-activated metaborate) and 90 (green-luminescing Ce- and Tb-activated metaborate) is shown. The location of the colour point on the line K of lamps provided with only the materials 70 and 90 is invariably determined by the relative quantum contributions of the materials 70 and 90 to the radiation emitted by the lamp. The distance of the colour point of the lamp (for example the point 80) to the point 70 divided by the distance between the points 70 and 90 is in fact proportional to the relative quantum contribution of the material 90 and to the relative luminous flux (lm/W) produced by the material 90 if it is provided in the lamp as the only luminescent material and further inversely proportional to the y coordinate of the colour point of the material 90. An analogous relation applies to the distance of the colour point 80 to the point 90. With the use of given materials 70 and 90 (for which consequently the relative luminous flux and the y coordinate are fixed) therefore only the relative quantum contributions determine the colour point of the lamp. For these materials 70 and 90, the required relative quantum contributions are then known if a certain colour point of the lamp is desired. These quantum contributions are in the first instance a measure of the quantities of the materials 70 and 90 to be used. When determining these quantities, the quantum efficiency and the absorption of exciting radiation of the materials 70 and 90 and further factors, such as, for example, the grain size of the materials used, should be taken into account. In general, it will be desirable to check on a few test lamps whether or not the desired relative quantum contributions are attained with a particular choice of the quantities of the luminescent materials. In Figure 2, the shift of the colour point 80 of a given mixture of the materials 70 and 90 is indicated if absorbing layers of the aforementioned garnet are used in layer thicknesses as stated in Table 1. With a layer thickness of, for example, 0.84 g per lamp, the point 83 is attained. By variation in the relative quantum contributions of the red-luminescing and the green-luminescing materials, all the colour points on the connection line L of the points 73 and 93 can be obtained.

In Figure 2, for illustration, the colour point  $u$  of a lamp according to the invention is indicated, which lamp has a colour temperature of 2660 K and a colour point  $x=0.462$  and  $y=0.409$  (substantially on the curve P). It appears from the location of the colour point  $u$  with respect to the points 70 and 90 of the metaborates, the points 10, 20 and 30 of the halophosphates and the points 40, 50 and 60 of the materials activated by  $\text{Eu}^{2+}$  that the lamp  $u$  cannot be manufactured with these luminescent materials if no absorption means are utilized. However, this lamp can be obtained with, for example, an absorption layer of the aforementioned garnet of 0.84 g per lamp and a combination of the luminescent materials mentioned above in connection with the colour points 10, 40, 70 and 90 in Figure 2. Due to the absorption layer, the colour points of these materials are shifted to 13, 43, 73 and 93, respectively. If no green-luminescing material (colour point 93) is used, the relative quantum contributions of 13 and 43 are fixed. These contributions in fact have then to be chosen so that the colour point  $u'$  is reached,  $u'$  being located on the connection line of 73 with  $u$ . By a suitable choice of the relative quantum contributions of 73 and of the combination  $u'$  the colour point  $u$  is reached. If as the fourth constituent the green-luminescing terbium-activated material is added to the luminescent layer, it is found that the ratio of the relative quantum contributions of 93 and 73 (93:73) is determined by the chosen ratio of the relative quantum contributions of 43 and 13 (43:13). According as the ratio 43:13 is larger, the ratio 93:73 also becomes larger in such a manner that the colour point obtained with 93 and 73 lies on the connection line of the colour point obtained with 43 and 13 and the point  $u$ . The largest ratio of 93:73 with which it is possible to reach the colour point  $u$  is indicated in Figure 2 by the point  $a$ . In this case, however, the luminescent layer does not contain any halophosphate. Although with all the ratios 93:73 with colour points between the



points 73 and *a* and located on the connection line L, the colour point *u* can be obtained by combination with 43 and 13, in general not every combination will lead to a lamp with an R(a,8) value of at least 85. Especially in those cases in which the contribution of the halophosphate is zero or very small, the lamp will not satisfy the requirements imposed. The range of 93:73 ratios with which lamps according to the invention are obtained can be determined with reference to a few test lamps. It has been found, for example, that the point *b* yields for the combination of 93 and 73 a lamp having a colour point *u* having an R(a,8) value of 95. The presence of such a range between 73 and *a* offers the advantage that optimization of the lamp is quite possible.

For further illustration, data are now given of nine series of lamps according to the invention, which are all of the 36 W-type described with reference to Figure 1 and in which invariably use is made of an absorption layer disposed on the inner wall of the lamp envelope and consisting of the aforementioned garnet  $Y_{2.9}Ce_{0.1}Al_5O_{12}$ . The luminescent layer disposed on the absorption layer comprises a mixture of luminescent materials chosen from the group of materials indicated in Table 2. Table 2 gives for each material a number by which the material will further be indicated, the formula, the colour coordinates *x* and *y* of the relevant material and the relative luminous flux  $\eta$  (in lumen/W) obtained if the material (as the only luminescent material) is provided in lamps of the 36 W-type. Numbers 400, 500 and 600 are blue-luminescing materials activated by  $Eu^{2+}$ ; numbers 100, 200 and 300 are luminescent halophosphates; numbers 701 to 708 inclusive are Ce-, Tb- and Mn-activated metaborates and number 700 is a Ce- and Mn-activated metaborate.

TABLE 2

Nr.	Formula	x	y	$\eta$
400	$Sr_{0.96}Eu_{0.02}Al_{3.5}O_{6.25}$	0.151	0.364	82
500	$2(Sr_{0.94}Eu_{0.06}O) \cdot 0.833P_2O_5 \cdot 0.167B_2O_3$	0.191	0.308	77
600	$Ba_{0.95}Eu_{0.05}Al_{8.10}O_{13.15}$	0.161	0.238	66
100	$Ca_{9.33}Cd_{0.12}(PO_4)_6F_{1.7}Cl_{0.4}; Sb_{0.125}Mn_{0.35}$	0.437	0.402	84
200	$Ca_{9.454}Cd_{0.04}(PO_4)_6F_{1.69}Cl_{0.286}; Sb_{0.09}Mn_{0.256}$	0.402	0.389	86
300	$Ca_{9.524}Cd_{0.04}(PO_4)_6F_{1.73}Cl_{0.226}; Sb_{0.09}Mn_{0.186}$	0.368	0.379	82
708	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.95}Mn_{0.05}B_5O_{10}$	0.477	0.390	56
707	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.94}Mn_{0.06}B_5O_{10}$	0.488	0.378	54
706	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.93}Mn_{0.07}B_5O_{10}$	0.498	0.363	50
705	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.92}Mn_{0.08}B_5O_{10}$	0.508	0.356	48
704	$Ce_{0.2}Gd_{0.6}Tb_{0.1}Mg_{0.92}Mn_{0.08}B_5O_{10}$	0.513	0.351	46
703	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.91}Mn_{0.09}B_5O_{10}$	0.518	0.345	46
702	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.90}Mn_{0.10}B_5O_{10}$	0.523	0.342	41
701	$Ce_{0.2}Gd_{0.6}Tb_{0.2}Mg_{0.88}Mn_{0.12}B_5O_{10}$	0.530	0.334	40
700	$Ce_{0.2}Gd_{0.8}Mg_{0.88}Mn_{0.12}B_5O_{10}$	0.545	0.309	34

For each of the said nine series of lamps, there is indicated hereinafter in Tables 3 to 11 inclusive which values of R(a,8) are reached. In the heading of each Table, the colour temperature  $T_c$  and the colour co-ordinates *x* and *y* of the relevant lamps are indicated. Furthermore, it is indicated therein which blue-luminescing material activated by  $Eu^{2+}$  and which halophosphate (from Table 2) are used. The vertical columns relate to the luminescent metaborate (indicated by the number from Table 2) which is used in the lamp. The horizontal lines in the Tables each relate to a given layer thickness of the garnet absorption layer (expressed in g per lamp). If for a given combination of garnet layer thickness and luminescent metaborate no value for R(a,8) is indicated in the Tables, this means that the relevant lamp with a value R(a,8) of at least 85 could not be obtained. By way of example, in both Tables 3 and 7 for a given combination of the luminescent materials there is indicated in the Tables which results are attained if the garnet absorption layer is replaced by an absorption layer of the yellow pigment nickel titanate. In general it has been found that a slightly higher R(a,8) value is possible, but at the expense of the relative luminous flux.

# 0 124 175

TABLE 3  
Lamps with  $T_c=2660$  K  $x=0.462$   $y=0.409$   
With lum. materials Nos. 400 and 100  
Values of  $R(a,8)$

5	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
	0.36	87							
10	0.42	88							
	0.48		86						
15	0.54		91*						
	0.60		90	87					
	0.66			92	89	87	85		
20	0.72			94	94	92	90	89	87
	0.78			89	94	95	94	94	91
25	0.84				90	93	94	95	95 88
	0.90					88	92	92	94 92
	0.96						87	88	92 95
30	1.02								87 94
	1.08								92
35	1.14								89
	1.20								85

\* Relative luminous flux 64 lumen/W.

40 If with the same combination of luminescent materials (400, 100 and 707), the garnet layer is replaced by a nickel titanate absorption layer (thickness  $0.115 \text{ mg/cm}^2$ ), a relative luminous flux of 58 lm/W and an  $R(a,8)$  value of 93 is found.

45

50

55

60

65

# 0 124 175

TABLE 4

Lamps with  $T_c=2660$  K  $x=0.462$   $y=0.409$ .

With lum. materials Nos. 400 and 200.

Values of  $R(a,8)$ .

5	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	807	706	705	704	703	702	701 700
	0.42	87							
10	0.48								
	0.54								
15	0.60		91						
	0.66			85					
	0.72			92	87				
20	0.78			92	93	90	87	86	
	0.84				92	95	93	93	89
25	0.90				86	91	94	94	95 86
	0.96						89	90	94 91
	1.02								89 93
30	1.08								93
	1.14								90
35	1.20								87

TABLE 5

Lamps with  $T_c=2660$  K  $x=0.462$   $y=0.409$ .

With lum. materials Nos. 400 and 300

Values of  $R(a,8)$

40	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
45	0.78			92	85				
	0.84			86	93	90	85		
	0.90				88	93	93	92	88
50	0.96					85	92	93	95
	1.02							86	92 89
55	1.08								85 95
	1.14								93
	1.20								89
60									
65									

TABLE 6  
Lamps with  $T_c=2930$  K  $x=0.439$   $y=0.400$ .  
With lum. materials Nos. 400 and 100  
Values of  $R(a,8)$

	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
5	0.24	86	88						
10	0.30		94	85					
	0.36		89	92	89	87	85		
15	0.42			95	94	92	90	90	88
	0.48			90	95	96	95	95	93 86
	0.54				90	93	95	95	96 91
20	0.60					87	91	91	94 94
	0.66						85	86	90 95
25	0.72								92

TABLE 7  
Lamps with  $T_c=2930$  K  $x=0.439$   $y=0.400$ .  
With lum. materials Nos. 400 and 200  
Values of  $R(a,8)$

	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
35	0.24	89							
	0.30								
	0.36		93						
40	0.42			89	85				
	0.48			94	93*	90	87	86	
45	0.54			86	93	96	94	93	90
	0.60				86	90	94	95	96 88
	0.66						88	89	93 93
50	0.72								87 95

\* Relative luminous flux 66 lm/W.

If with the same combination of luminescent materials (400, 200 and 705), the garnet layer is replaced by a nickel titanate absorption layer (thickness  $0.115 \text{ mg/cm}^2$ ), a relative luminous flux of 59 lm/W and an  $R(a,8)$  value of 96 are found.

# 0 124 175

TABLE 8

Lamps with  $T_c=2930$  K  $x=0.439$   $y=0.400$ .  
With lum. materials Nos. 400 and 300  
Values of  $R(a,8)$

5	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
	0.48			89					
10	0.54			89	92	88			
	0.60				89	94	93	92	88
15	0.66					85	91	93	95
	0.72								90 91

TABLE 9

Lamps with  $T_c=2660$  K  $x=0.462$   $y=0.409$ .  
With lum. materials Nos. 500 and 100  
Values of  $R(a,8)$

25	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
	0.42	95							
	0.48	89							
30	0.54	87							
	0.60		86						
35	0.66		90						
	0.72		91	86					
	0.78		88	90	87	85			
40	0.84			93	90	88	86	86	
	0.90			92	93	92	90	89	87
45	0.96			89	94	94	93	93	91 85
	1.02				90	93	95	95	94 88
	1.08				86	90	93	93	95 91
50	1.14					85	89	90	93 93
	1.20							86	89 95

55

60

65

# 0 124 175

TABLE 10  
Lamps with  $T_c=2930$  K  $x=0.439$   $y=0.400$   
With lum. materials Nos. 500 and 200  
Values of  $R(a,8)$

5	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
	0.30	88							
10	0.36	89							
	0.42		87						
15	0.48		92						
	0.54		90	89	86				
20	0.60		85	93	90	88	86	86	
	0.66			92	94	92	90	90	88
	0.72			88	93	95	94	94	92 86
25	0.78				89	92	94	95	95 90
	0.84					87	90	92	94 94
30	0.90						85	87	90 95
	0.96								86 94
	1.02								91
35	1.08								87
40									
45									
50									
55									
60									
65									

# 0 124 175

TABLE 11  
Lamps with  $T_c=2930$  K  $x=0.439$   $y=0.400$ .  
With lum. materials Nos. 600 and 100  
Values of  $R(a,8)$

5	Layer thickness garnet (g per lamp)	Luminescent metaborate No.							
		708	707	706	705	704	703	702	701 700
	0.42	86							
10	0.48	89							
	0.54	90							
15	0.60	87	88						
	0.66		91	85					
	0.72		92	88	86				
20	0.78		90	91	89	87	86	95	
	0.84		87	94	92	90	89	88	87
25	0.90			93	94	93	92	91	90 86
	0.96			90	94	95	95	94	93 88
	1.02			86	91	94	95	95	95 91
30	1.08				88	91	93	94	95 94
	1.14					87	90	91	93 95
35	1.20						86	87	90 95

In the following examples of lamps according to the invention, use was made of luminescent materials which have been indicated already in Table 2 and which will be denoted by the number given therein. Furthermore, the aforementioned garnet ( $Y_{2.9}Ce_{0.1}Al_3O_{12}$ ) was used as absorption means in the form of an absorption layer or mixed with the remaining luminescent materials. If not stated otherwise, the lamps are of the type described with reference to Figure 1 (36 W-type).

## Example 1

A lamp was provided with a garnet absorption layer (1.8 g per lamp) on which a luminescent layer (layer thickness approximately 4.2 g per lamp) was disposed comprising a homogeneous mixture of

- 24.5% by weight of No. 600
- 7.3% by weight of No. 100
- 7.3% by weight of No. 300
- 60.9% by weight of No. 700.

The colour temperature  $T_c$  (in K), the colour point (x,y) the colour rendering index  $R(a,8)$  and the relative luminous flux  $\eta$  (in lm/W) of the lamp were measured

$T_c=2380$  K       $x=0.486$        $y=0.412$   
 $R(a,8)=92$        $\eta=55$  lm/W.

## Example 2

A lamp was provided with a garnet absorption layer (0.9 g per lamp) on which a luminescent layer (layer thickness approximately 4.2 g per lamp) was disposed comprising a homogeneous mixture of

- 15.1% by weight of No. 400
- 27.1% by weight of No. 200
- 57.8% by weight of No. 702.

There were measured:

$$T_e = 2670 \text{ K} \quad x = 0.463 \quad y = 0.412$$

$$R(a,8) = 94 \quad \eta = 55 \text{ lm/W.}$$

### Example 3

A lamp was provided with a luminescent layer (approximately 4.3 g per lamp) of a homogeneous mixture of:

14% by weight of No. 400  
36.3% by weight of No. 100  
49.7% by weight of No. 703,

to which was added 4 g of garnet ( $Y_{2.9}Ce_{0.1}Al_5O_{12}$ ) per 100 g of the homogeneous mixture.  
There were measured:

$$T_e = 2940 \text{ K} \quad x = 0.438 \quad y = 0.399$$

$$R(a,8) = 92 \quad \eta = 66 \text{ lm/W.}$$

### Example 4

A lamp having a length of 150 cm and an inner diameter of 26 mm suitable for operation at 58 W was provided with the same luminescent layer as described in Example 3 (layer thickness approximately 5.4 g per lamp).

There were measured:

$$T_e = 3040 \text{ K} \quad x = 0.435 \quad y = 0.405$$

$$R(a,8) = 91 \quad \eta = 67 \text{ lm/W.}$$

### Example 5

A lamp was provided with a luminescent layer (approximately 4.3 g per lamp) of a homogeneous mixture of:

17% by weight of No. 400  
35% by weight of No. 100  
48% by weight of No. 703

to which was added 5 g of garnet per 100 g, of the homogeneous mixture.  
There were measured:

$$T_e = 3090 \text{ K} \quad x = 0.433 \quad y = 0.407$$

$$R(a,8) = 94 \quad \eta = 67 \text{ lm/W.}$$

### Example 6

A lamp was provided with a luminescent layer (approximately 4.3 g per lamp) of a homogeneous mixture of:

13.3% by weight of No. 400  
25.6% by weight of No. 100  
61.1% by weight of No. 703,

to which was added 7 g of garnet per 100 g of the homogeneous mixture.  
There were measured:

$$T_e = 2690 \text{ K} \quad x = 0.458 \quad y = 0.406$$

$$R(a,8) = 96 \quad \eta = 61 \text{ lm/W.}$$

The spectral energy distribution of the emitted radiation of this lamp is shown in Figure 3. In this Figure, the wave-length  $\lambda$  in nm is plotted on the abscissa. The emitted radiation energy  $E$  per wavelength interval of 5 nm is plotted on the ordinate.



## 0 124 175

### Example 7

A lamp was provided with a luminescent layer (approximately 4.3 g per lamp) of a homogeneous mixture of

- 5      13.3% by weight of No. 400
- 25.6% by weight of No. 100
- 61.1% by weight of No. 703,

to which was added 9 g of garnet per 100 g of the homogeneous mixture.

10      There were measured:

$$T_e = 2680 \text{ K} \quad x = 0.462 \quad y = 0.412$$

$$R(a,8) = 95 \quad \eta = 62 \text{ lm/W.}$$

### 15 Example 8

A lamp was provided with a first luminescent layer (approximately 1.82 g per lamp) of a homogeneous mixture of 99% by weight of No. 100 and 1% by weight of garnet.

A second luminescent layer (approximately 2.06 g per lamp) was provided on the first layer, said second layer consisting of a homogeneous mixture of

- 20      12.7% by weight of No. 400
- 24.9% by weight of No. 100
- 62.4% by weight of No. 707,

25      to which was added 1.5 g of garnet per 100 g of the homogeneous mixture.

        There were measured:

$$T_e = 2970 \text{ K} \quad x = 0.435 \quad y = 0.396$$

$$R(a,8) = 93 \quad \eta = 68 \text{ lm/W.}$$

### 30 Example 9

A lamp was provided with a first luminescent layer (approximately 2.02 g per lamp) of a homogeneous mixture of 1.77 g of No. 100 and 0.25 g of garnet. A second luminescent layer (approximately 2.13 g per lamp) was provided on the first layer, said second layer consisting of a homogeneous mixture of

- 35      20.5% by weight of No. 400
- 35.5% by weight of No. 100
- 44% by weight of No. 703.

40      There were measured:

$$T_e = 3004 \text{ K} \quad x = 0.434 \quad y = 0.399$$

$$R(a,8) = 95 \quad \eta = 68 \text{ lm/W.}$$

### 45 Example 10

A lamp as described in Example 9 was made, in which however the garnet from the first luminescent layer was left out and in which the mass of the first layer was approximately 1.98 g per lamp and the mass of the second layer was approximately 2.07 g per lamp. This lamp which did not contain means for absorbing blue radiation (not according to the invention) gave the following measuring results:

$$50 \quad T_e = 3238 \text{ K} \quad x = 0.410 \quad y = 0.373$$

$$R(a,8) = 92.5 \quad \eta = 65 \text{ lm/W.}$$

55      Then this lamp was provided at the outer surface of the envelope with a yellow-coloured polyester shrinkage foil (thickness approximately 50  $\mu$ ), which foil was mainly absorbing radiation having wavelengths below 450 nm. In this manner provided with absorption means this lamp according to the invention gave the following measuring results:

$$60 \quad T_e = 3016 \text{ K} \quad x = 0.442 \quad y = 0.416$$

$$R(a,8) = 92.3 \quad \eta = 58 \text{ lm/W.}$$

65      Three lamps (Examples 11, 12 and 13) were made of the 36W-type (Figure 1) using the luminescent materials Nr. 100, 400 and 703 as given in table 2. Each lamp contained as absorption means, mixed with

the remaining luminescent materials, a luminescent cerium activated garnet, wherein garnets were used having different gallium contents. Increasing the Ga-content in the garnet (by substitution of Al with Ga) has the effect of shifting the maximum absorption of the garnet in the blue part of the spectrum (400—480 nm) to shorter wavelengths. All three lamps had colour temperature of appr. 3000 K ( $x=0.434$  and  $y=0.398$ ).

#### Example 11

A lamp was provided with a luminescent layer (appr. 4.5 g per lamp) of a homogeneous mixture of:

- 10 15.5% by weight of No. 400
- 29.6% by weight of No. 100
- 54.9% by weight of No. 703,

to which was added 8 g of the garnet  $Y_{2.5}Ce_{0.1}Al_4GaO_{12}$  per 100 g of the homogeneous mixture.

- 15 There were measured:  $R(a,8)=95$   $\eta=66$  lm/W.

#### Example 12

A lamp was provided with a luminescent layer (appr. 4.5 g per lamp) of a homogeneous mixture of:

- 20 13.3% by weight of No. 400
- 37.5% by weight of No. 100
- 49.2% by weight of No. 703,

to which was added 6.4 g of the garnet  $Y_{2.5}Ce_{0.1}Al_2Ga_3O_{12}$  per 100 g of the homogeneous mixture.

- 25 There were measured:  $R(a,8)=94$   $\eta=68$  lm/W.

#### Example 13

A lamp was provided with a luminescent layer (appr. 4.5 g per lamp) of a homogeneous mixture of:

- 30 13.2% by weight of No. 400
- 31.9% by weight of No. 100
- 54.9% by weight of No. 703,

to which was added 6.4 g of the garnet  $Y_{2.5}Ce_{0.1}Al_2Ga_3O_{12}$  per 100 g of the homogeneous mixture.

- 35 There were measured:  $R(a,8)=95$   $\eta=66$  lm/W.

#### Claims

- 1. A low-pressure mercury vapour discharge lamp having a very satisfactory colour rendition, a colour temperature of the emitted white light in the range of 2300 to 3300 K and a colour point on or near the Planckian curve and provided with a gas-tight radiation-transparent envelope containing mercury and a rare gas and with a luminescent layer comprising a luminescent halophosphate and a luminescent material activated by bivalent europium, characterized in that the luminescent layer comprises:

- a. at least one luminescent alkaline earth metal halophosphate activated by trivalent antimony and bivalent manganese and having a colour temperature of the emitted radiation of 2900 to 5000 K;
- b. at least one luminescent material activated by bivalent europium with an emission maximum in the range of 470 to 500 nm and a half-value width of the emission band of at most 90 nm, and
- c. a luminescent rare earth metal metaborate activated by trivalent cerium and bivalent manganese, having a monoclinic crystal structure, whose fundamental lattice corresponds to the formula  $Ln(Mg,Zn,Cd)B_5O_{10}$ , in which Ln is at least one of the elements yttrium, lanthanum and gadolinium and in which up to 20 mol.% of the B can be replaced by Al and/or Ga, which metaborate exhibits red  $Mn^{2+}$  emission, and in that the lamp is provided with means for absorbing at least in part blue radiation having wavelengths below 480 nm.

- 2. A lamp as claimed in Claim 1, characterized in that the luminescent layer further contains a luminescent material activated by trivalent terbium (material *d*), which exhibits green  $Tb^{3+}$  emission.

- 3. A lamp as claimed in Claim 2, characterized in that the luminescent metaborate *c* is further activated by trivalent terbium, the metaborate *c* being at the same time the material *d*, and corresponds to the formula



- in which

$$\begin{aligned} 0.01 &\leq f \leq 1-g \\ 0.01 &\leq g \leq 0.75 \\ 0.01 &\leq h \leq 0.30 \end{aligned}$$

- and in which up to 20 mol.% of the B can be replaced by Al and/or Ga.

# 0 124 175

4. A lamp as claimed in Claim 1, 2 or 3, characterized in that the means for absorbing blue radiation are constituted by the radiation-transparent envelope of the lamp.

5. A lamp as claimed in any of Claims 1, 2 or 3, characterized in that the means for absorbing blue radiation are constituted by a yellow pigment.

5 6. A lamp as claimed in Claim 5, characterized in that the pigment is mixed with the luminescent materials of the luminescent layer.

7. A lamp as claimed in Claim 5, characterized in that the pigment is provided on the inner side of the lamp envelope as an absorption layer, on which the luminescent layer is disposed on the side facing the discharge.

10 8. A lamp as claimed in any of Claims 1, 2 or 3, characterized in that the means for absorbing blue radiation are constituted by a luminescent aluminate activated by trivalent cerium having a garnet crystal structure according to the formula  $M_{3-j}Ce_jAl_{6-k-p}Ca_kSc_pO_{12}$ , in which M is at least one of the elements yttrium, gadolinium, lanthanum and lutetium and in which

$$\begin{aligned} 15 \quad & 0.01 \leq j \leq 0.15 \\ & 0 \leq k \leq 3, \\ & 0 \leq p \leq 1. \end{aligned}$$

9. A lamp as claimed in Claim 8, characterized in that M is yttrium and  $k=p=0$ .

20 10. A lamp as claimed in Claim 8 or 9, characterized in that the garnet activated by  $Ce^{3+}$  is mixed with the remaining luminescent materials of the luminescent layer.

11. A lamp as claimed in Claim 8 or 9, characterized in that the garnet activated by  $Ce^{3+}$  is applied on the inner side of the lamp envelope as an absorption layer on which the luminescent layer is disposed on the side facing the discharge.

25 12. A lamp as claimed in any one of Claims 1 to 11, characterized in that the material *b* is a luminescent aluminate activated by bivalent europium corresponding to the formula  $Sr_{1-q-r}Ca_qEu_rAl_sO_{1+s-1}$ , in which

$$\begin{aligned} 30 \quad & 0 \leq q \leq 0.25, \\ & 0.001 \leq r \leq 0.10 \text{ and} \\ & 2 \leq s \leq 5, \end{aligned}$$

which aluminate has its emission maximum at 485—495 nm and has a half-value width of 55—75 nm.

13. A lamp as claimed in any one of Claims 1 to 11, characterized in that the material *b* is a luminescent aluminate activated by bivalent europium corresponding to the formula




in which

$$\begin{aligned} 40 \quad & 0 \leq t \leq 0.25, \\ & 0.005 \leq r \leq 0.25 \text{ and} \\ & 5 \leq s \leq 10, \end{aligned}$$

which aluminate has its emission maximum at 475—485 nm and has a half-value width of 70—90 nm.

45 14. A lamp as claimed in any one of Claims 1 to 11, characterized in that the material *b* is a luminescent borate phosphate activated by bivalent europium corresponding to the formula



50 in which

$$\begin{aligned} 55 \quad & 0 \leq v \leq 0.5 \\ & 0 \leq w \leq 0.2 \\ & 0.001 \leq z \leq 0.15 \\ & 1.75 \leq m \leq 2.30 \\ & 0.05 \leq n \leq 0.23, \end{aligned}$$

which borate-phosphate has its emission maximum at 470—485 nm and has a half-value width of 80—90 nm.

## 60 Patentansprüche

1. Niederdruckquecksilberdampfentladungslampe mit einer sehr guten Farbwiedergabe, mit einer Farbtemperatur des ausgetrahlten weissen Lichts im Bereich von 2300 bis 3300 K und mit dem Farbpunkt auf oder nahe bei der Planck-Kurve, mit einem gasdichten, strahlungsdurchlässigen Kolben, der

Quecksilber und Edelgas enthält, und mit einer Leuchtstoffschicht, die ein leuchtendes Halophosphat und einen mit zweiwertigem Europium aktivierten Leuchtstoff enthält, dadurch gekennzeichnet, dass die Leuchtstoffschicht folgendes enthält:

- a zumindest ein mit dreiwertigem Antimon und mit zwei wertigem Mangan aktiviertes leuchtendes Erdalkalimetallhalophosphat mit einer Farbtemperatur des ausgestrahlten Lichts von 2900 bis 5000 K;  
b zumindest einen mit zweiwertigem Europium aktivierten Leuchtstoff mit einem Emissionsmaximum im Bereich von 470 bis 500 nm und mit einer Halbwertbreite des Emissionsbandes von höchstens 90 nm, und

c ein mit dreiwertigem Cer und mit zweiwertigem Mangan aktiviertes leuchtendes Seltenerdmetallmetaborat mit monokliner Kristallstruktur, dessen Grundgitter der Formel  $\text{Ln}(\text{Mg}, \text{Zn}, \text{Cd})\text{B}_5\text{O}_{10}$  entspricht, worin Ln zumindest eines der Elemente Yttrium, Lanthan und Gadolinium darstellt und bis zu 20 Mol % des B durch Al und/oder Ga ersetzt sein kann und dieses Metaborat rote  $\text{Mn}^{2+}$ -Emission aufweist, und dass die Lampe mit Mitteln zum wenigstens teilweisen Absorbieren von blauer Strahlung mit Wellenlängen unter 480 nm versehen ist.

2. Lampe nach Anspruch 1, dadurch gekennzeichnet, dass die Leuchtstoffschicht weiter einen mit dreiwertigem Terbium aktivierten Leuchtstoff (Stoff d) enthält, der grüne  $\text{Tb}^{3+}$ -Emission aufweist.

3. Lampe nach Anspruch 2, dadurch gekennzeichnet, dass das leuchtende Metaborat c weiter mit dreiwertigem Terbium aktiviert ist, wobei das Metaborat c gleichzeitig der Stoff d ist und nachstehender Formel entspricht:



worin

$$\begin{aligned} 0,01 &\leq f \leq 1-g \\ 0,01 &\leq g \leq 0,75 \\ 0,01 &\leq h \leq 0,30, \end{aligned}$$

und worin bis zu 20 Mol % des B durch Al und/oder Ga ersetzt sein kann.

4. Lampe nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, dass die Mittel zum Absorbieren blauer Strahlung durch den strahlungsdurchlässigen Kolben der Lampe gebildet werden.

5. Lampe nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, dass die Mittel zum Absorbieren blauer Strahlung durch ein gelbes Pigment gebildet werden.

6. Lampe nach Anspruch 5, dadurch gekennzeichnet, dass das Pigment mit den Leuchtstoffen der Leuchtstoffschicht gemischt ist.

7. Lampe nach Anspruch 5, dadurch gekennzeichnet, dass das Pigment an der Innenseite des Lampenkolbens als Absorptionsschicht angebracht ist, auf der an der der Entladung zugewandten Seite die Leuchtstoffschicht liegt.

8. Lampe nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, dass die Mittel zum Absorbieren blauer Strahlung durch ein leuchtendes, mit dreiwertigem Cer aktiviertes Aluminat mit Granatkristallstruktur der Formel  $\text{M}_{1-j} \text{Ce}_j \text{Al}_{5-k-p} \text{Ca}_k \text{Sc}_p \text{O}_{12}$  gebildet werden, worin M zumindest eines der Elemente Yttrium, Gadolinium, Lanthan und Lutetium darstellt, und worin

$$\begin{aligned} 0,01 &\leq j \leq 0,15 \\ 0 &\leq k \leq 3 \\ 0 &\leq p \leq 1. \end{aligned}$$

9. Lampe nach Anspruch 8, dadurch gekennzeichnet, dass M Yttrium und  $k=p=0$  ist.


10. Lampe nach Anspruch 8 oder 9, dadurch gekennzeichnet, dass der mit  $\text{Ce}^{3+}$  aktivierte Granat mit den übrigen Leuchtstoffen gemischt ist.

11. Lampe nach Anspruch 8 oder 9, dadurch gekennzeichnet, dass der mit  $\text{Ce}^{3+}$  aktivierte Granat an der Innenseite des Lampenkolbens als Absorptionsschicht angebracht ist, auf der an der der Entladung zugewandten Seite die Leuchtstoffschicht liegt.

12. Lampe nach einem oder mehreren der Ansprüche 1 bis 11, dadurch gekennzeichnet, dass der Stoff b ein mit zweiwertigem Europium aktiviertes leuchtendes Aluminat ist, das der Formel  $\text{Sr}_{1-q-r} \text{Ca}_q \text{Eu}_r \text{Al}_5 \text{O}_{13-s-1}$  entspricht, worin  $0 \leq q \leq 0,25$ ,  $0,001 \leq r \leq 0,10$  und  $2 \leq s \leq 5$  ist, und dieses Aluminat sein Emissionsmaximum bei 485 ... 495 nm und eine Halbwertbreite von 55 ... 75 nm hat.

13. Lampe nach einem oder mehreren der Ansprüche 1 bis 11, dadurch gekennzeichnet, dass der Stoff b ein mit zweiwertigem Europium aktiviertes leuchtendes Aluminat ist, das der Formel  $\text{Ba}_{1-t-r} \text{Sr}_t \text{Eu}_r \text{Al}_5 \text{O}_{13-s-1}$  entspricht, worin  $0 \leq t \leq 0,25$ ,  $0,005 \leq r \leq 0,25$  und  $5 \leq s \leq 10$  ist, und dieses Aluminat sein Emissionsmaximum bei 475 ... 485 nm und eine Halbwertbreite von 70 ... 90 nm hat.

14. Lampe nach einem oder mehreren der Ansprüche 1 bis 11, dadurch gekennzeichnet, dass der Stoff b ein mit zweiwertigem Europium aktiviertes leuchtendes Boratphosphat ist, das der Formel



entspricht, worin

$$\begin{aligned} 0 &\leq v \leq 0,5 \\ 0 &\leq w \leq 0,2 \\ 0,001 &\leq z \leq 0,15 \\ 1,75 &\leq m \leq 2,30 \\ 0,05 &\leq n \leq 0,23, \end{aligned}$$

und dieses Boratphosphat sein Emissionsmaximum bei 470 ... 485 nm und eine Halbwertbreite von 80 ... 90 nm hat.

# Revendications

1. Lampe à décharge dans la vapeur de mercure à basse pression présentant un rendu des couleurs très satisfaisant, une température de couleur de la lumière blanche émise dans la gamme de 2300 à 3300 K et un point de couleur sur ou près de la courbe de Planck, munie d'une enveloppe, qui est transparente au rayonnement et étanche au gaz et qui contient du mercure et un gaz rare, et d'une couche luminescente contenant un halophosphate luminescent et un matériau luminescent activé à l'aide d'euporium bivalent, caractérisée en ce que la couche luminescente comporte:


a. au moins un halophosphate de métal alcalino terreux luminescent activé à l'aide d'antimoine trivalent et de manganèse bivalent, présentant une température de couleur du rayonnement émis comprise entre 2900 et 5000 K,

b. au moins un matériau luminescent activé à l'aide d'euporium bivalent présentant un maximum d'émission dans la gamme comprise entre 470 et 500 nm et une largeur de la bande d'émission à mi-énergie d'au maximum 90 nm, et

c. un métaborate de métal alcalino terreux luminescent activé à l'aide de cérium trivalent et de manganèse trivalent, présentant une structure cristalline monoclinique, dont le réseau de base répond à la formule  $\text{Ln}(\text{Mg}, \text{Zn}, \text{Cd})\text{B}_5\text{O}_{10}$ , dans laquelle Ln représente au moins l'un des éléments yttrium, lanthane et gadolinium et dans laquelle jusqu'à 20% en moles du B peut être remplacé par Al et/ou Ga, métaborate qui présente une émission rouge de  $\text{Mn}^{2+}$ , et que la lampe est munie de moyens pour absorber au moins partiellement, la rayonnement bleu présentant des longueurs d'onde inférieures à 480 nm.

2. Lampe selon la revendication 1, caractérisée en ce que la couche luminescente contient en outre un matériau luminescent activé à l'aide de terbium trivalent (matériau d), émettant une émission de  $\text{Tb}^{3+}$  verte.

3. Lampe selon la revendication 2, caractérisée en ce que le métaborate luminescent c est en outre activé à l'aide de terbium trivalent, le métaborate c étant également le matériau d, et satisfait à la formule



dans laquelle

$$\begin{aligned} 0,01 &\leq f \leq 1-g \\ 0,01 &\leq g \leq 0,75 \\ 0,01 &\leq h \leq 0,30 \end{aligned}$$

et dans laquelle jusqu'à 20% en moles du B peut être remplacé par Al et/ou Ga.


4. Lampe selon la revendication 1, 2 ou 3, caractérisée en ce que les moyens pour l'absorption du rayonnement bleu sont constitués par une enveloppe transparente au rayonnement de la lampe.

5. Lampe selon l'une des revendications 1, 2 ou 3, caractérisée en ce que les moyens pour l'absorption du rayonnement bleu sont constitués par un pigment jaune.

6. Lampe selon la revendication 5, caractérisée en ce que le pigment est mélangé avec les matériaux luminescents de la couche luminescente.

7. Lampe selon la revendication 5, caractérisée en ce que le pigment est appliqué sur la face intérieure de l'enveloppe de la lampe comme une couche d'absorption, sur laquelle est appliquée la couche luminescente du côté situé vis-à-vis de la décharge.

8. Lampe selon l'une des revendications 1, 2 ou 3, caractérisée en ce que les moyens pour l'absorption du rayonnement bleu sont constitués par un aluminat luminescent activé à l'aide de cérium trivalent et présentant une structure cristalline de grenat répondant à la formule



dans laquelle M est au moins l'un des éléments yttrium, radolinium, lanthane et lutétium et dans laquelle

$$\begin{aligned} 0,01 &\leq j \leq 0,15 \\ 0 &\leq k \leq 3 \\ 0 &\leq p \leq 1. \end{aligned}$$

# 0 124 175

9. Lampe selon la revendication 8, caractérisée en ce que M est de l'yttrium et  $k=p=0$ .

10. Lampe selon la revendication 8 ou 9, caractérisée en ce que le grenat activé à l'aide de  $Ce^{3+}$  est mélangé avec les autres matériaux luminescents de la couche luminescente.

11. Lampe selon la revendication 8 ou 9, caractérisée en ce que le grenat activé à l'aide de  $Ce^{3+}$  est appliqué sur la face intérieure de l'enveloppe de la lampe comme une couche d'absorption sur laquelle est appliquée la couche luminescente du côté situé vis-à-vis de la décharge.

12. Lampe selon l'une des revendications 1 à 11, caractérisée en ce que le matériau *b* est un aluminat luminescent activé à l'aide d'euporium bivalent et répondant à la formule



formule dans laquelle

$$\begin{aligned} 0 \leq q \leq 0,25, \\ 0,001 \leq r \leq 0,10 \text{ et} \\ 2 \leq s \leq 5, \end{aligned}$$

aluminat qui présente son maximum d'émission de 485 à 495 nm et qui présente une demi-largeur de 55 à 75 nm.

13. Lampe selon l'une des revendications 1 à 11, caractérisée en ce que le matériau *b* est un aluminat luminescent activé à l'aide d'euporium bivalent et répondant à la formule




dans laquelle

$$\begin{aligned} 0 \leq t \leq 0,25, \\ 0,005 \leq r \leq 0,25 \text{ et} \\ 5 \leq s \leq 10, \end{aligned}$$

aluminat qui présente son maximum d'émission à 475 à 485 nm et qui présente une largeur de bande à mi-énergie de 70 à 90 nm.

14. Lampe selon l'une des revendications 1 à 11, caractérisée en ce que le matériau *b* est un phosphate-borate luminescent activé à l'aide d'euporium bivalent et répondant à la formule



dans laquelle

$$\begin{aligned} 0 \leq v \leq 0,5 \\ 0 \leq w \leq 0,2 \\ 0,001 \leq z \leq 0,15 \\ 0,75 \leq m \leq 2,30 \\ 0,05 \leq n \leq 0,23, \end{aligned}$$

phosphate-borate qui présente son maximum d'émission à 470 à 485 nm et une largeur de bande à mi-énergie de 80 à 90 nm.

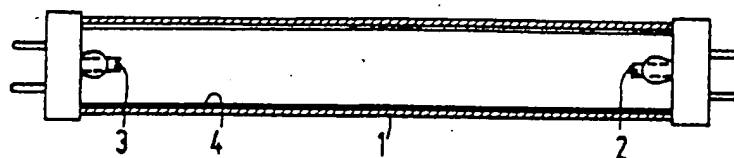


FIG.1

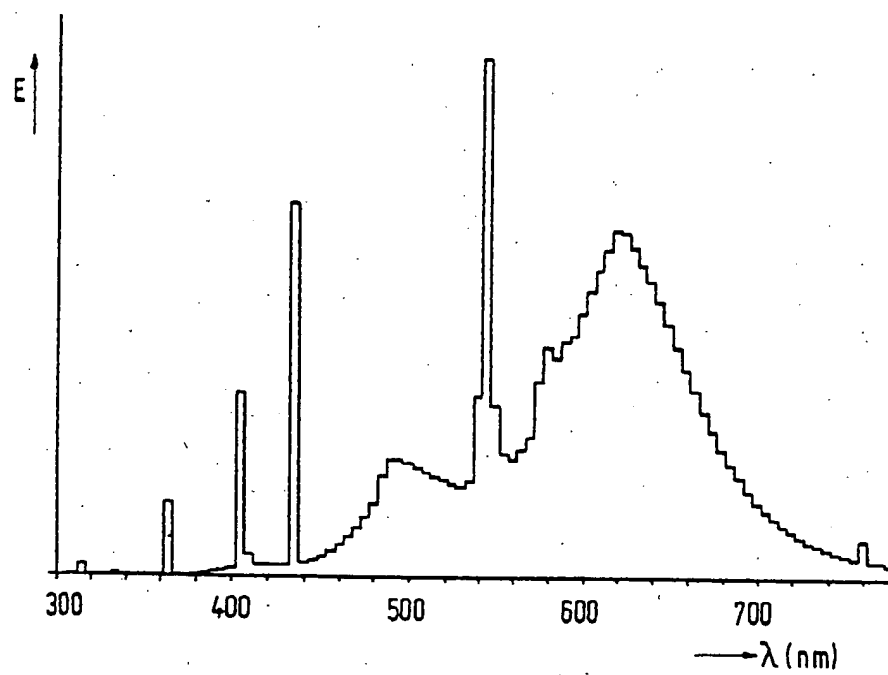


FIG.3

